

# ZipUP

UNDERDECK® SYSTEMS

A Division of  MP global products, LLC

## FEATURES & BENEFITS

Professionally Approved Product.

Quick and Easy to Install.

Requires Fewer Tools.

Meets Class A Fire Rating.

Saves Headroom in Tight Spaces.

Panels are Easy to Remove  
and Replace for Plumbing or Electrical Access.

Clean, Grid-free Look.

Easy to Clean.

Stain, Mold, & Mildew Resistant.

Interlocking Design is Water-tight.

Paintable with Latex Paint.



## 25 YEAR LIMITED WARRANTY

MP Global Products, LLC ("Manufacturer") warrants that its Zip-UP Underdeck® System ("Product") is free from defects in manufacturing, materials and workmanship for a period of 25-years from the date the Product was originally purchased (the "Limited Warranty Period"). Manufacturer further warrants that the Product will snap together as designed for the limited warranty period. This limited warranty is extended to the original purchaser of the Product (the "Owner") and is subject to the exclusion and limitations provided below. This warranty is not transferable during the Limited Warranty Period.

IN THE EVENT OF A DEFECT, MALFUNCTION OR OTHER FAILURE OF THE PRODUCT (NOT OTHERWISE EXCLUDED BELOW), THE MANUFACTURER WILL REMEDY THE DEFECT OR FAILURE WITHOUT CHARGE TO THE CONSUMER PROVIDED NOTICE OF THE WARRANTY CLAIM IN THE MANNER PROVIDED BELOW IS RECEIVED BY MANUFACTURER WITHIN THE LIMITED WARRANTY PERIOD. THE REMEDY FOR ANY SUCH DEFECT, FAILURE OR MALFUNCTION IS LIMITED, AT MANUFACTURERS OPTION, TO THE REPAIR, REPLACEMENT, OR REFUND OF THE PURCHASE PRICE OF THE PRODUCT. THE REPAIR OR REPLACEMENT OPTIONS ARE LIMITED TO THE REPLACEMENT COST OF THE PRODUCT.

THIS LIMITED WARRANTY IS FURTHER SUBJECT TO THE CONDITIONS, LIMITATIONS, AND EXCLUSIONS PROVIDED ON THE REVERSE SIDE.

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS THAT VARY FROM STATE TO STATE IN THE UNITED STATES OF AMERICA.

5 Year Limited Fade Warranty. MP Global Products, LLC ("Manufacturer") warrants that its Zip-UP Ceiling Underdeck ("Product") will not fade for a period of 5 years from the date the Product was originally purchased.

### CONDITIONS/EXCLUSIONS TO THE LIMITED WARRANTY

THIS 25-YEAR LIMITED WARRANTY IS FURTHER MADE SUBJECT TO THE FOLLOWING CONDITIONS AND EXCLUSIONS, PLEASE READ THE FOLLOWING CAREFULLY:

1. Required Installation. To be covered by this Limited Warranty, the Product must be installed following the Manufacturer's recommended installation instructions.
2. Damage Coverage. This warranty only covers damage caused to the Product.
3. Limitation on Causes of Defects Covered Under Warranty. This limited warranty covers only defects in manufacturing materials or workmanship and does not cover defects, malfunctions or failures resulting from any other cause including, without limitation: (i) improper or inadequate installation; (ii) defects caused by fire, flood, tornado, hurricane, acts of God, extraordinary environmental conditions, riot or other civil insurrections, or acts of war or conflict; (iii) defects caused by abusive conditions or accidents, such as but not limited to cutting or severe impact; (iv) installation or use of the product in any manner not recommended by the Manufacturer including, but not limited to, installation under uneven ceiling structures; and, (v) defects caused by improper or inadequate maintenance, cleaning, use or care of the Product including without limitation the use of improper or un-recommended cleaning solutions or cleaning practices.
4. Required Procedures to Submit a Warranty Claim. In order to obtain performance of any warranty obligation, the Owner must do the following:

Contact the Manufacturer at the toll free number listed below or by mail at the address listed below, and request a claim form. Complete and return the claim form to the Manufacturer within the Limited Warranty Period. The phone number and address to contact the Manufacturer for these purposes is as follows:

MP Global Products, LLC  
Attention: Zip-UP Warranty Claim Department  
2500 Old Hadar Road | P.O. Box 2283  
Norfolk, Nebraska USA 68702-2283  
Phone: (888) 449-4787 | Fax: (586) 294-6672


UNDER NO CIRCUMSTANCES SHALL MANUFACTURER BE LIABLE TO THE OWNER, OR ANY OTHER PERSON FOR ANY CONSEQUENTIAL, INCIDENTAL, ECONOMIC, DIRECT, INDIRECT, GENERAL, OR SPECIAL DAMAGES ARISING OUT OF ANY BREACH OF WARRANTY, EXPRESS OR IMPLIED, UNDER THIS CONTRACT.

SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

# ZipUP

UNDERDECK® SYSTEMS

A Division of  MP global products, LLC

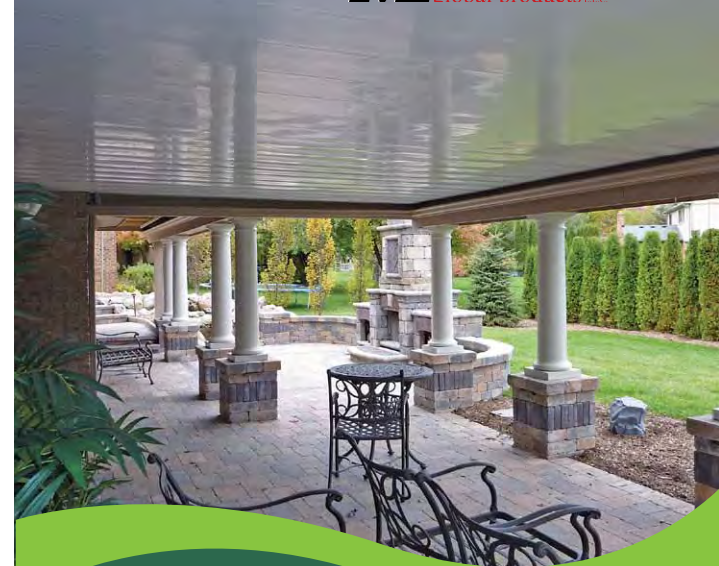

## A Revolutionary New Underdecking System!

*Watertight*

*Will Not Stain Or Corrode*

*Easy To Clean*

*Paintable With Latex Paint*

*Installs In Half The Time*




For Information Call **888.449.4787**



www.zipupunderdeck.com • 888.449.4787



**KEEP YOUR PATIO  
CLEAN & DRY**

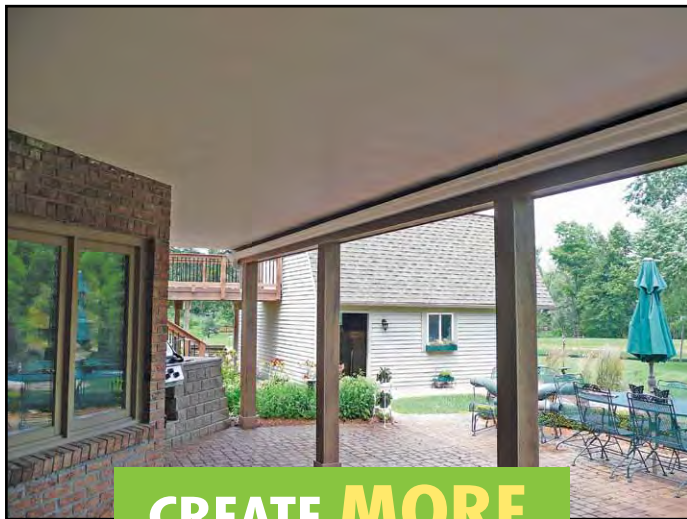

**CREATE MORE  
LIVABLE  
OUTDOOR  
SPACE!**



Zip-UP Underdeck® finishes the underside of your deck providing dry, useable outdoor living space without sacrificing headroom or the beauty of your deck. The Zip-UP Underdeck® System provides ease of installation and a washable mold resistant surface, while channeling any water from above to your gutter system.

With its many advantages such as its best-in-class rating for severe weather conditions, minimal tool requirement, low maintenance, and clean non-corrugated look, we are confident Zip-UP UnderDeck® is the best way to finish your exterior space.



## 5 COMPONENTS DO IT ALL!



### Wall Trim:

The "E" shaped trim that attaches to the walls or joist around the entire periphery.  
12' length



### Main Rail:

The mounting pieces that will run the length of your room attached to your joists.  
12' and 16' lengths



### Panel:

The visible surface of your Zip-UP UnderDeck® System. The panels "Zip-UP" into the rails allowing for easy maintenance access.  
1' Width / 12' and 16' lengths



### Seam Trim:

Allows for the extension of your ceiling application by capping the ends of your Main Rails that do not end at Wall Trim. The next section is installed the same as the first.  
12' length



### Pitching Rail:

Used to impart a slope of 1/8 inch per foot in order to properly drain your under deck system in the direction of your gutter. They come in 1 inch and 1/2 inch profiles and are stacked incrementally every 4 feet to provide proper pitch.  
12' length

## INSTALLS IN 5 EASY STEPS!

1. Attach pitching rails for drainage.
2. Attach wall trim around the perimeter of the deck.
3. Insert the first panel into the wall trim, and seal as instructed in the installation guide.
4. Attach the first main rail to the first panel.
5. Secure the main rail to the pitch rail.

**Repeat steps 3-5 across the room.**

*\*see installation guide for complete instructions.*